

# 1565

## Elbow three piece




Tiemme 1565 fittings are suitable for all types of domestic and commercial hydraulic system, industrial and agricultural applications, heating, sanitary systems and generally with any non-corrosive fluid, including methane gas and LPG.

### TECHNICAL SPECIFICATIONS

- Maximum temperature: 110 °C (for methane and LPG 60 °C)
- Minimum temperature: - 20°C (provided that the fluid remains in the liquid phase)
- Maximum operating pressure: 30 bar (for compressed air max 10 bar, for methane and LPG max 5 bar)
- Threads: male UNI ISO 228  
female UNI ISO 228

### CONSTRUCTION SPECIFICATIONS

- Body : EN12165 brass
- Nut : EN12165 brass
- Tail : EN12165 brass
- O-ring : Nitrile rubber NBR

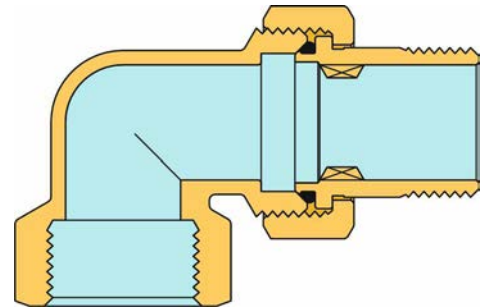

### PRODUCTION RANGE

Art.	Code		Finishing
1565	1500410	3/8"X3/8"	-
	1500105	1/2"X1/2"	-
	1500063	3/4"X3/4"	-
	1500068	1"X1"	-
	1500194	1"1/4X1"1/4	-
	1500229	1"1/2X1"1/2	-
	1500281	2"X2"	-

### CERTIFICATIONS



### CERTIFICATIONS

