

1552FDR

Straight male/male with plain ends and o-ring




The brass generic fittings are suitable for domestic and commercial plumbing, industrial, agricultural application and generally with every non aggressive fluid.

TECHNICAL SPECIFICATIONS

Maximum temperature: 150 °C
 Minimum temperature: - 20°C (provided that the fluid remains in the liquid phase)
 Maximum operating pressure: 30 bar
 Threads: male UNI ISO 228

CONSTRUCTION SPECIFICATIONS

Body : EN12165 brass
 O-ring : Ethylene Propylene Rubber EPDM

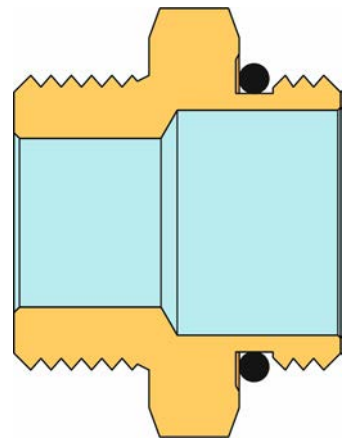

PRODUCTION RANGE

Art.	Code		Finishing
1552FDR	4710004	3/4" FLAT SEAT X 3/4"	-
	4710046	1" FLAT SEAT X 3/4"	-

CERTIFICATIONS



CERTIFICATIONS

