

1553FD

Straight cylindrical pipe/male with plain ends and o-ring




The brass generic fittings are suitable for domestic and commercial plumbing, industrial, agricultural application and generally with every non aggressive fluid.

TECHNICAL SPECIFICATIONS


Maximum temperature: 200 °C
Minimum temperature: - 20°C (provided that the fluid remains in the liquid phase)
Maximum operating pressure: 30 bar
Threads: male UNI ISO 228

CONSTRUCTION SPECIFICATIONS

Body : EN12165 brass

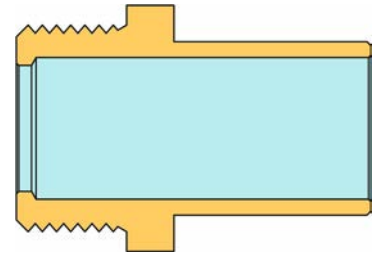

Installation example

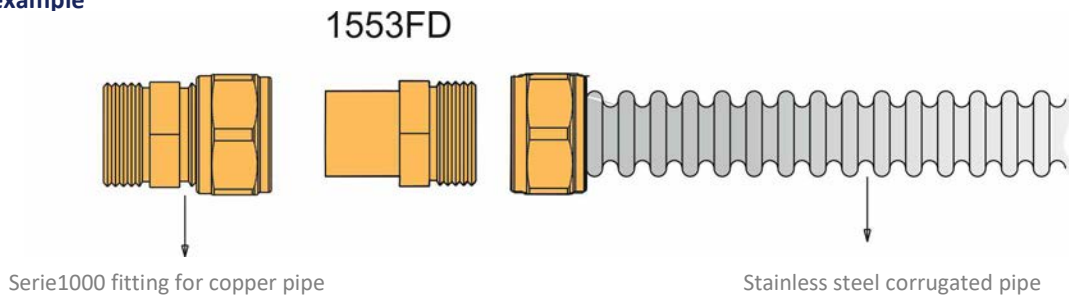

PRODUCTION RANGE

Art.	Code		Finishing
1553FD	4710057	15 X 3/4"	-
	4710016	22 X 3/4"	-
	4710036	22 X 1"	-

CERTIFICATIONS



CERTIFICATIONS

