

1560CT

Elbow female/female COMPACT




The brass generic fittings are suitable for domestic and commercial plumbing, industrial, agricultural application and generally with every non aggressive fluid.

TECHNICAL SPECIFICATIONS

- Maximum temperature: 200 °C
- Minimum temperature: - 20°C (provided that the fluid remains in the liquid phase)
- Maximum operating pressure: 30 bar
- Threads: female UNI ISO 228

CONSTRUCTION SPECIFICATIONS

Body : EN12165 brass

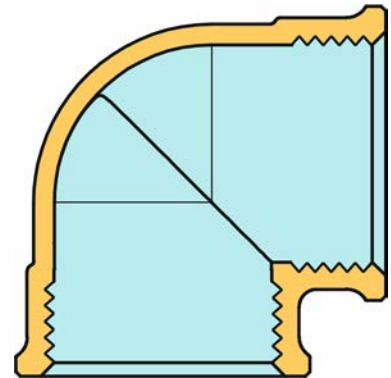

PRODUCTION RANGE

Art.	Code		Finishing
1560CT	1500810	1/2"X1/2"	-
	1500811	3/4"X3/4"	-
	1500812	1"X1"	-

CERTIFICATIONS



CERTIFICATIONS



1560CT.W_Rev.B_10/2022 - TIEMME RACCORDERIE S.p.A. reserves the right to make changes at any time without notice. No form of reproduction is permitted, unless authorised